



EMT6518

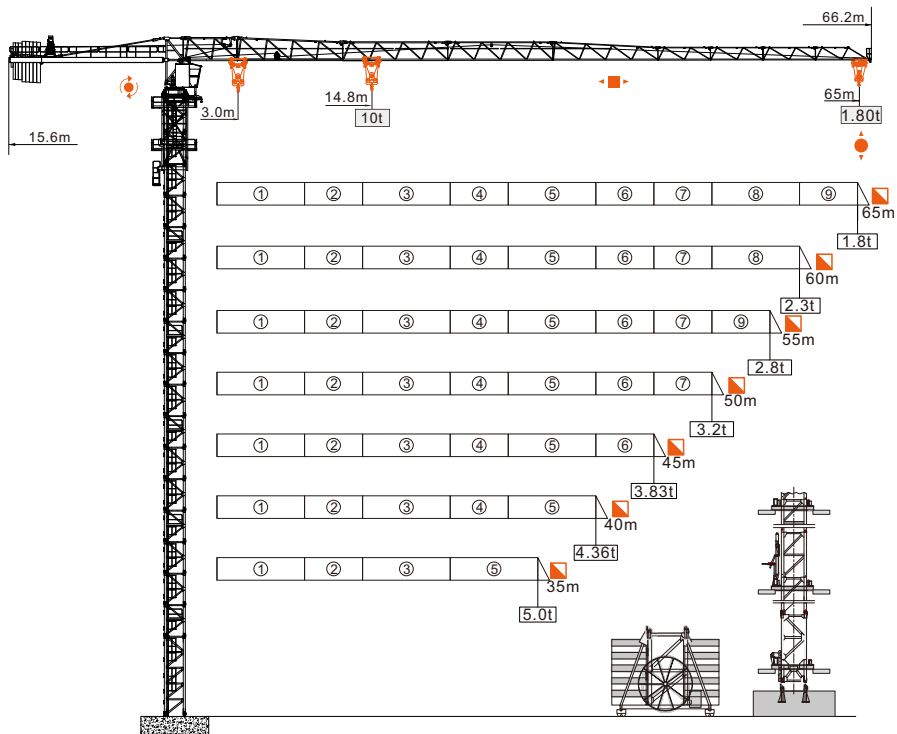


Mast composition

Composición de mástil Композиция мачты


Stationary

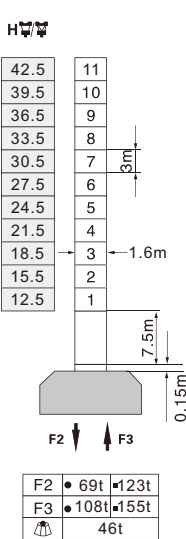

Traveling

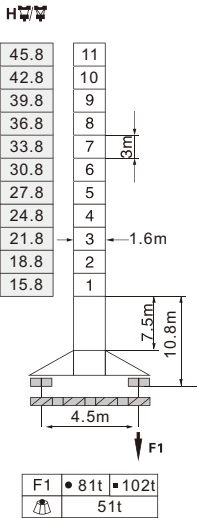


Inner climbing

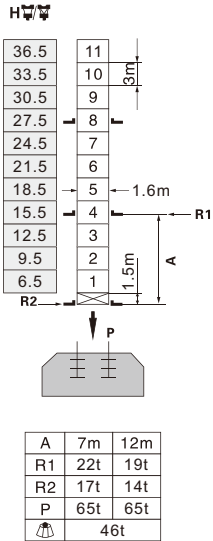

- In service F₂ Reactions
- Out of service Total weight without load and counter weight

Anchorage

Anclajes Анкеры

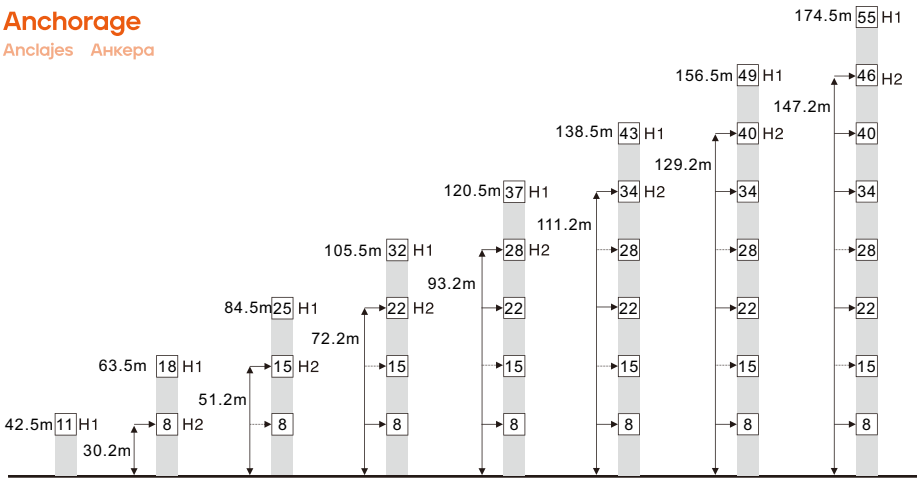


H1— Height under hook
H2— Height of anchorage frame to the ground
① > 174.5m Consult us


Mast composition

Composición de mástil Композиция мачты


Stationary

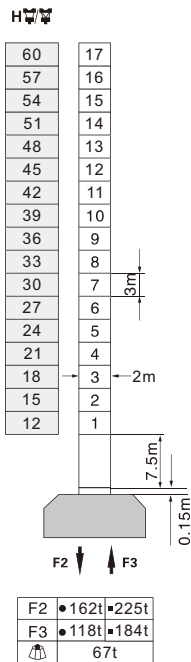

Traveling

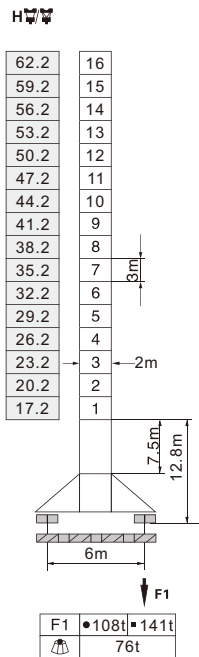


Inner climbing

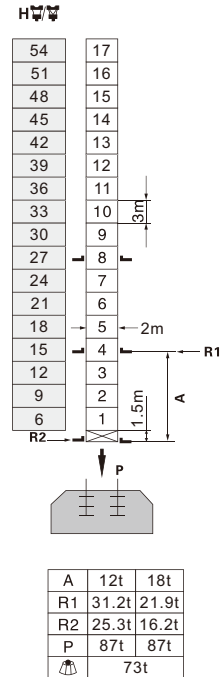

- In service F_r Reactions
- Out of service ⚖ Total weight without load and counter weight

Anchorage

Anclajes Анкера

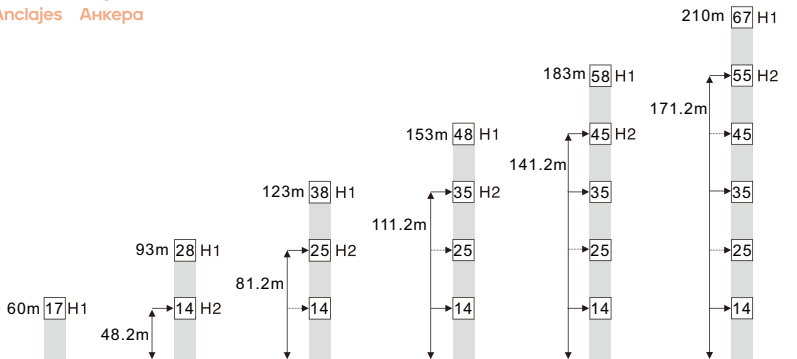

- H1— Height under hook
- H2— Height of anchorage frame to the ground
- ① > 210m Consult us

Load chart

Curvas de cargas Кривые нагрузок

Jib (m)	Fall	Range (m)	3-14.8	15	20	25	30	35	40	45	50	55	60	65
65	IV	Load (t)	10	9.89	7.07	5.42	4.34	3.57	3.01	2.57	2.22	1.93	1.70	1.50
	II		5					4.64	3.87	3.31	2.87	2.52	2.23	2.00
Jib (m)	Fall	Range (m)	3-16.5	15	20	25	30	35	40	45	50	55	60	
60	IV	Load (t)	10	10.00	7.99	6.16	4.95	4.10	3.46	2.97	2.58	2.26	2.00	
	II		5					4.40	3.76	3.27	2.88	2.56	2.30	
Jib (m)	Fall	Range (m)	3-17.6	15	20	25	30	35	40	45	50	55		
55	IV	Load (t)	10	10.00	8.67	6.69	5.39	4.47	3.79	3.26	2.84	2.50		
	II		5					4.77	4.09	3.56	3.14	2.80		
Jib (m)	Fall	Range (m)	3-17.9	15	20	25	30	35	40	45	50			
50	IV	Load (t)	10	10.00	8.82	6.80	5.48	4.55	3.86	3.32	2.90			
	II		5					4.85	4.16	3.62	3.20			
Jib (m)	Fall	Range (m)	3-18.6	15	20	25	30	35	40	45				
45	IV	Load (t)	10	10.00	9.22	7.12	5.75	4.78	4.06	3.53				
	II		5						4.36	3.83				
Jib (m)	Fall	Range (m)	3-18.6	15	20	25	30	35	40					
40	IV	Load (t)	10	10.00	9.22	7.12	5.75	4.78	4.06					
	II		5						4.36					
Jib (m)	Fall	Range (m)	3-18.6	15	20	25	30	35						
35	IV	Load (t)	10	10.00	9.22	7.12	5.75	4.78						
	II		5											

Counter weight

Contrapeso Противовес

		3000kg	1000kg	 kg
65m	15.6m	6	2	20000kg
60m	15.6m	6	1	19000kg
55m	15.6m	6	0	18000kg
50m	15.6m	5	2	17000kg
45m	15.6m	5	1	16000kg
40m	15.6m	4	2	14000kg
35m	15.6m	4	0	12000kg

Mechanism

Mecanismos Механизмы

Name	Model						Power
Hoisting 	50LVF25	m/min	t	m/min	t	620m Inverter Control	37Kw
		0~40	5	0~20	10		
		0~80	2.5	0~40	5		
Trolleying 	7.5DVF	m/min	0~60			Inverter Control	5.5Kw
Slewing 	7.5RVF×2	r/min	0~0.7			Inverter Control	2×5.5Kw
Traveling 	14TVF	m/min	0~24			Inverter Control	2 × 5.2Kw
Power Supply				380V/50Hz 440V/60Hz (± 5%)			
Necessary Power				67KVA/80KVA(traveling)			

※ Specifications and data is not legally binding.
For any technical information,please refer to the corresponding instructions.