



EMK6015

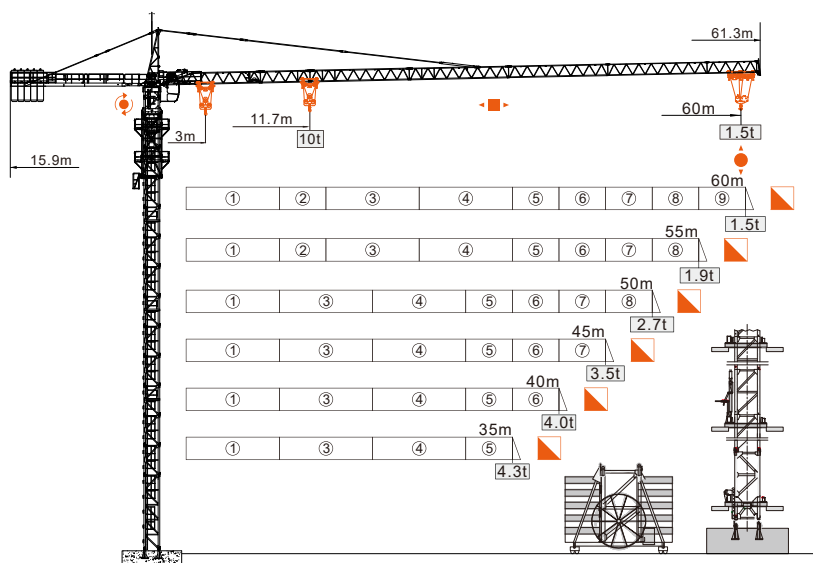


Mast composition

Composición de mástil Композиция мачты


Stationary

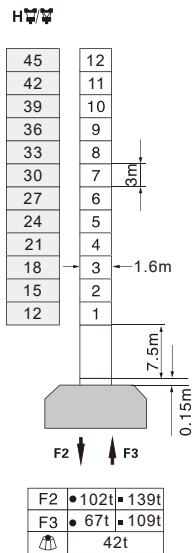

Traveling

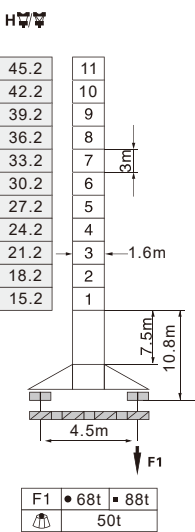


Inner climbing

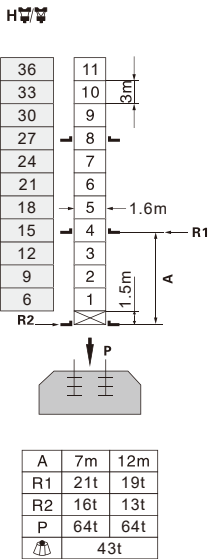

- In service F₂ Reactions
- Out of service ⚖ Total weight without load and counter weight

Anchorage

Anclajes Анкеры

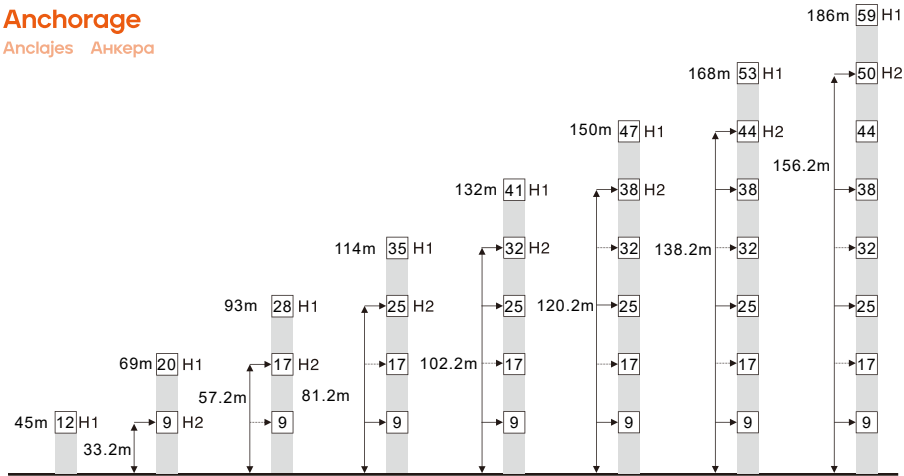

H1— Height under hook
H2— Height of anchorage frame to the ground
① > 186m Consult us

Load chart

Curvas de cargas Кривые нагрузок

Jib (m)	Fall	Range (m)	3~11.7	15	20	25	30	35	40	45	50	55	60
60	IV	Load (t)	10	7.44	5.30	4.04	3.22	2.64	2.21	1.87	1.61	1.39	1.21
	II		5			4.33	3.51	2.93	2.50	2.16	1.90	1.68	1.50
Jib (m)	Fall	Range (m)	3~12.8	15	20	25	30	35	40	45	50	55	
55	IV	Load (t)	10	7.72	5.60	4.34	3.63	2.99	2.51	2.14	1.85	1.61	
	II		5			4.83	3.92	3.28	2.80	2.43	2.14	1.90	
Jib (m)	Fall	Range (m)	3~18.0	20	25	30	35	40	45	50			
50	IV	Load (t)	10	6.98	5.44	4.57	3.79	3.21	2.77	2.41			
	II		5				4.08	3.50	3.06	2.70			
Jib (m)	Fall	Range (m)	3~18.0	20	25	30	35	40	45				
45	IV	Load (t)	10	7.96	6.22	5.25	4.37	3.72	3.21				
	II		5				4.66	4.01	3.50				
Jib (m)	Fall	Range (m)	3~18.0	20	25	30	35	40					
40	IV	Load (t)	10	7.95	6.21	5.24	4.36	3.71					
	II		5				4.65	4.00					
Jib (m)	Fall	Range (m)	3~17.0	20	25	30	35						
35	IV	Load (t)	10	7.34	5.73	4.83	4.01						
	II		5				4.30						

Counter weight

Contrapeso Противовес

		3450kg	2250kg	 kg
60m	15.9m	4	2	18300kg
55m	15.9m	3	3	17100kg
50m	15.9m	3	2	14850kg
45m	15.9m	5	1	19500kg
40m	15.9m	4	2	18300kg
35m	15.9m	3	3	17100kg

Mechanism

Mecanismos Механизмы

Name	Model						Power
Hoisting 	50LVF25	m/min	t	m/min	t	620m Inverter Control	37Kw
		0-40	5	0-20	10		
		0-80	2.5	0-40	5		
Trolleying 	7.5DVF	m/min	0-60			Inverter Control	5.5Kw
Slewing 	7.5RVF×2	r/min	0-0.7			Inverter Control	2×5.5Kw
Traveling 	14TVF	m/min	0-24			Inverter Control	2 × 5.2Kw
Power Supply				380V/50Hz 440V/60Hz (± 5%)			
Necessary Power				67KVA/80KVA(traveling)			

※ Specifications and data is not legally binding.
For any technical information, please refer to the corresponding instructions.