



55m - 1.600kg

50m - 1.900kg

45m - 2.200kg

38m - 2.500kg

33m - 2.800kg


I

II

III



IV

V

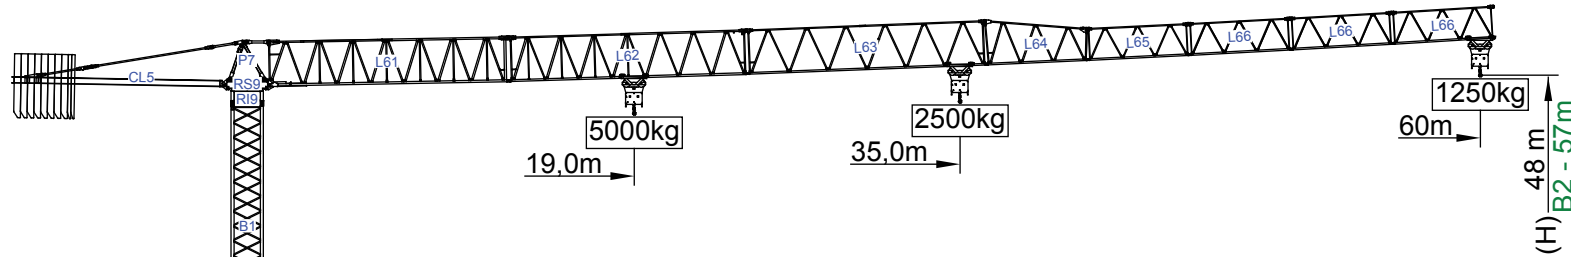

Cargas.Loads.Lasten.Charges.Cargas.Carichi.Yükler. ГРУЗОПОДЪЕМНОСТЬ

			Kg/m		m	18	23	28	33	38	45	50	55	60
18000 kg 8x2000 + 2x1000 kg	60m	L61+L62+L63+L64 +L65+L66+L66+L66	5000 M/KG	2500	35 m	2500	2500	2500	2500	2250	1800	1600	1400	1250
18000 kg 8x2000 + 2x1000 kg	55m	L61+L62+L63+L64 +L65+L66+L66	5000 M/KG	2500	38,5 m	2500	2500	2500	2500	2250	1800	1600	1400	1250
17000 kg 8x2000 + 1x1000 kg	50m	L61+L62+L63+L64 L65+L66	5000 M/KG	2500	40 m	2500	2500	2500	2500	2250	1800	1600	1400	1250
15000 kg 7x2000 + 1x1000 kg	45m	L61+L62+L63+L64+L66	5000 M/KG	2500	40,5 m	2500	2500	2500	2500	2250	1800	1600	1400	1250
11000 kg 5x2000 + 1x1000 kg	38m	L61+L62+L64+L65+L66	5000 M/KG	2500	38 m	2500	2500	2500	2500	2250	1800	1600	1400	1250
10000 kg 5x2000 kg	33m	L61+L62+L64+L66	5000 M/KG	2500	33 m	2500	2500	2500	2500	2250	1800	1600	1400	1250

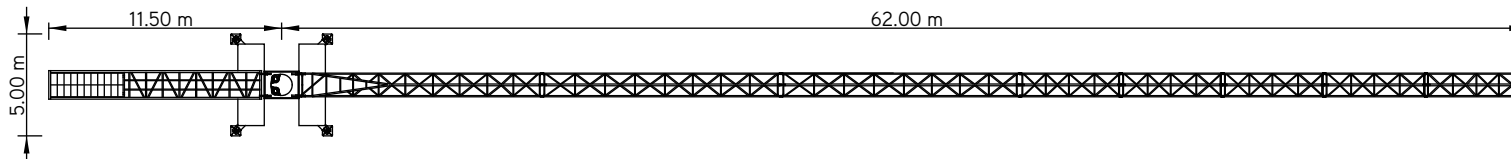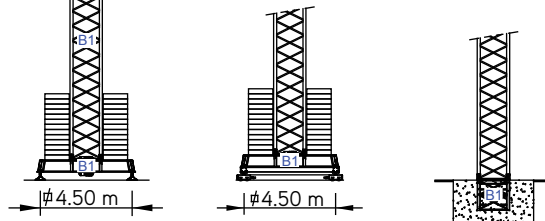

AYMAC

OFFICIAL DISTRIBUTOR IN TURKEY


SGT 6012TL

60m - 1.250kg


5.000Kg

Características . Characteristics . Eigenschaften
Caractéristiques . Carscteristics . Carstteristiche
Özellikler . ХАРАКТЕРИСТИКИ

	0 a 1 r.p.m.	2x5 daN.m
	0 a 60 m/min	3 kW
	15 m/min	2x3 kW




	0 a 76 m/min	15 kW
	0 a 38 m/min	

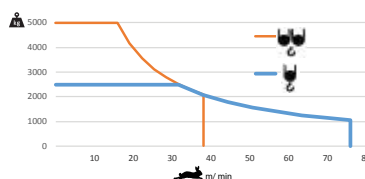

	30 kVA
	400 V +- 5% (50/60 Hz)

Velocidade de elevação . Hoisting speed . Hubgeschwindigkeit . Vitesse d'élevation .
Velocidad de elevacion . Velocità di sollevamento . Kaldırma hızı (m/min) .
Скорость подъема (м/мин)

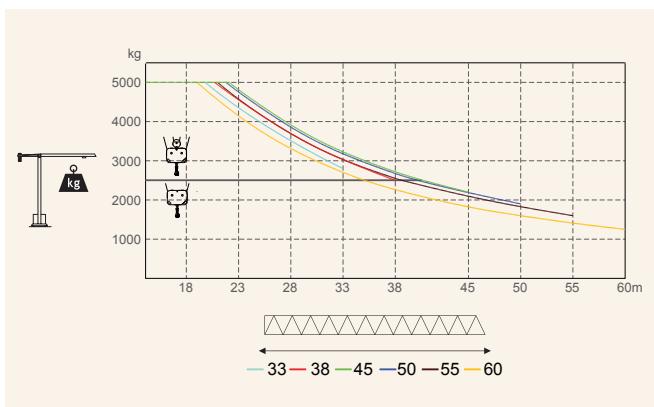

Elementos . Parts . Teile . Éléments . Elementos . Elemento . Parçalar . ЭЛЕМЕНТЫ

		A (mm)	B (mm)	C (mm)	kg	Code
L61		11850	1310	2900	3730	531 60 12
L62		11850	1160	2250	1280	
L63		11850	1160	2250	1020	
L64		5110	1160	2250	400	
L65		5110	1160	1610	330	
L66		5110	1160	1610	3x300 900	
RS9 RI9		2505	1700	1950	4650	
P7		1200	2360	6080	7025	
CL5		10550	1500	500	3720	
CP3		1160	165	3140	2x1000 2000	704 10 00
CP2		1160	330	3140	8x2000 16000	704 20 00
TOTAL					41055	
B1		12000	1620	1620	3450	508 12 00
B1		6130	1620	1620	1800	508 06 00
B1		3195	1620	1620	1070	508 06 01
B1		3195	1830	1830	1100	508 06 03
B1		1775	1600	1600	650	508 06 02
B1		6620	500	1040	1850	608 00 01
		3210	340	1040	2x950 1900	
TOTAL					3750	